

# HE25L 2.0

## Multi-Spectrum Binocular



HIKMICRO HABROK 4K 2.0 HE25L 2.0 is a powerful and innovative digital and thermal binocular designed especially for daytime use. Combined with a 256 thermal detector, an advanced 4K digital detector for a 5.5x to 22x @60 mm lens, and a 1000m laser rangefinder, this all-in-one binocular can be mainly applied in forest & field hunting, birding, animal searching, adventuring, and rescuing in various weather conditions.

### Key Feature

- 256 × 192 resolution @12  $\mu$ m thermal detector
- High sensitivity thermal module NETD < 18 mK (@25°C, F# = 1.0)
- 25 mm, F1.0 lens with thermal detection range up to 1200 m
- 3840 × 2160 4K ultra high-resolution CMOS detector
- 60 mm, F2.2 digital lens with 5.5x to 22x digital zoom
- HIKMICRO Shutterless Image System (HSIS)
- 940 nm & 850 nm replaceable IR illuminators and Laser Rangefinder of 1000 m distance
- 895g lightweight, with a compact and ergonomic design

## • Specification


Thermal Module	
Image Sensor	VOx Uncooled Focal Plane Arrays
Max. Resolution	256 × 192
Frame Rate	50 Hz
Pixel Interval	12 μm
Response Waveband	8 μm to 14 μm
NETD	Less than 18 mK (@25°C), F#=1.0
Lens (Focal Length)	25 mm, F1.0
Focus Mode	Rear Focus Wheel
Detection Range	1200 m
Min. Focusing Distance	3 m
Magnification	4.3x~17.2x (4x) Support 2x, 3x, 4x, 5x Zooming Value, Support Zoom in and out
Field of View(H × V), Degrees / m @100m	7.0° × 5.3°/12.2 m × 9.3 m
Optical Module	
Image Sensor	1/1.8 Progressive Scan CMOS
Max. Resolution	3840 × 2160
Focal Length	60 mm, F2.2
Min. Working Distance	8 m
Focus Mode	Rear Focus Wheel
Magnification	5.5x~22.0x (4x) Support 2x, 3x, 4x, 5x Zooming Value, Support Zoom in and out
Field of View (H × V), Degrees/m @100 m	7.3° × 4.1°/12.8 m × 7.2 m
Smart IR	Yes
IR Illuminator Wavelength	940 nm (default) and 850 nm (replaceable)
Viewing Range at Night	400 m
Replaceable IR Illuminator	Yes
Image Display	
Display	0.49 inch, OLED, 1920 × 1080
Palettes	Thermal: Black Hot, White Hot, Red Hot, Fusion, Red Monochrome, Green Monochrome; Optical: Day, Night, Auto, Green, Yellow
Exit Pupil	8 mm
Eye Relief	15 mm
Diopter (Range)	-5D~+3D
Brightness Adjustment	Yes
Tone Adjustment	Cold, Warm
Contrast Adjustment	Yes

Electric Image Stabilization	Supports Both Thermal and Digital Channels, Starting from 2x
Zoom Pro	Yes
HSIS (HIKMICRO Shutterless Image System)	Yes
<b>System</b>	
Record Video	Yes
Capture Snapshot	Yes
Audio Recording	Yes
Standby Mode	Yes
Storage	Built-in EMMC (64 GB)
PIP	Yes
Hotspot	Yes
Hot Track	Yes
Digital Magnetic Compass	Yes
GPS	Yes
Local Album	Yes
<b>Power Supply</b>	
Battery Type	Replaceable and Rechargeable Li-ion Battery
Battery Operating Time	≥6.5 h (25 °C, with hotspot and LRF on)
Type-C Power Supply	5V DC, 2 A Supports External Power Supply, Supports Direct Charging
<b>General</b>	
Protection Level	IP67
Dimension	143.1mm × 74.8 mm × 223.3 mm (5.63" × 2.95" × 8.8")
Working Temperature	-30°C~+55°C
Weight	895g without Batteries
Interpupillary Adjustment Range	60 mm to 74 mm
Mounting Adapter	1/4"-20-UNC
<b>Laser Rangefinder</b>	
Safety Class for Laser	Class 1
Wavelength	905 nm
Max. Measuring Range	1000 m
Measurement Accuracy	±1 m
Min. Measuring Range	10 m

## ▪ Available Model


HE25L 2.0

## ▪ Dimension

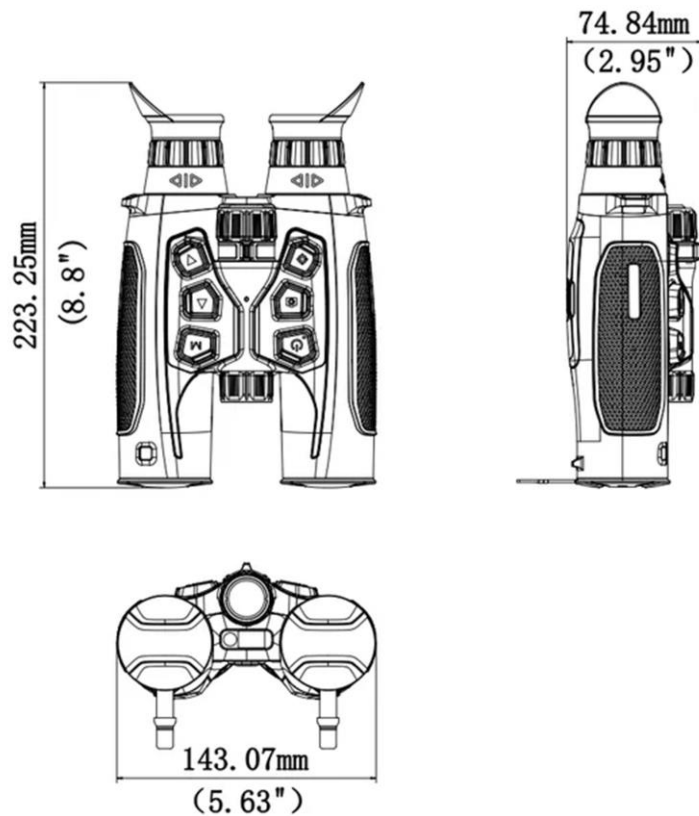

Unit: mm (Inch)

## ▪ Accessories

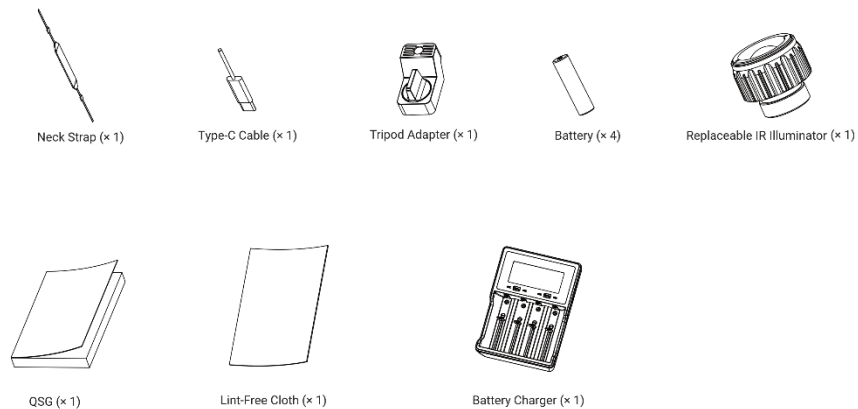

**COMPLIANCE NOTICE:** The thermal series products might be subject to export controls in various countries or regions, including without limitation, the United States, European Union, United Kingdom and/or other member countries of the Wassenaar Arrangement. Please consult your professional legal or compliance expert or local government authorities for any necessary export license requirements if you intend to transfer, export, re-export the thermal series products between different countries.



Hikmicro Hunting.Global HIKMICRO Outdoor [www.hikmicrotech.com](http://www.hikmicrotech.com) [hikmicro\\_hunting\\_global](https://www.instagram.com/hikmicro_hunting_global) HIKMICRO [info@hikmicrotech.com](mailto:info@hikmicrotech.com)

Room 313, Unit B, Building 2, 399 Danfeng Road, Xixing Subdistrict, Binjiang District, Hangzhou, Zhejiang  
© Hangzhou Microimage Software Co., Ltd. All rights reserved. | Data subject to change without notice!